


## TECHNICAL SPECIFICATION




### HU 02 High Voltage

REAR ELEVATION

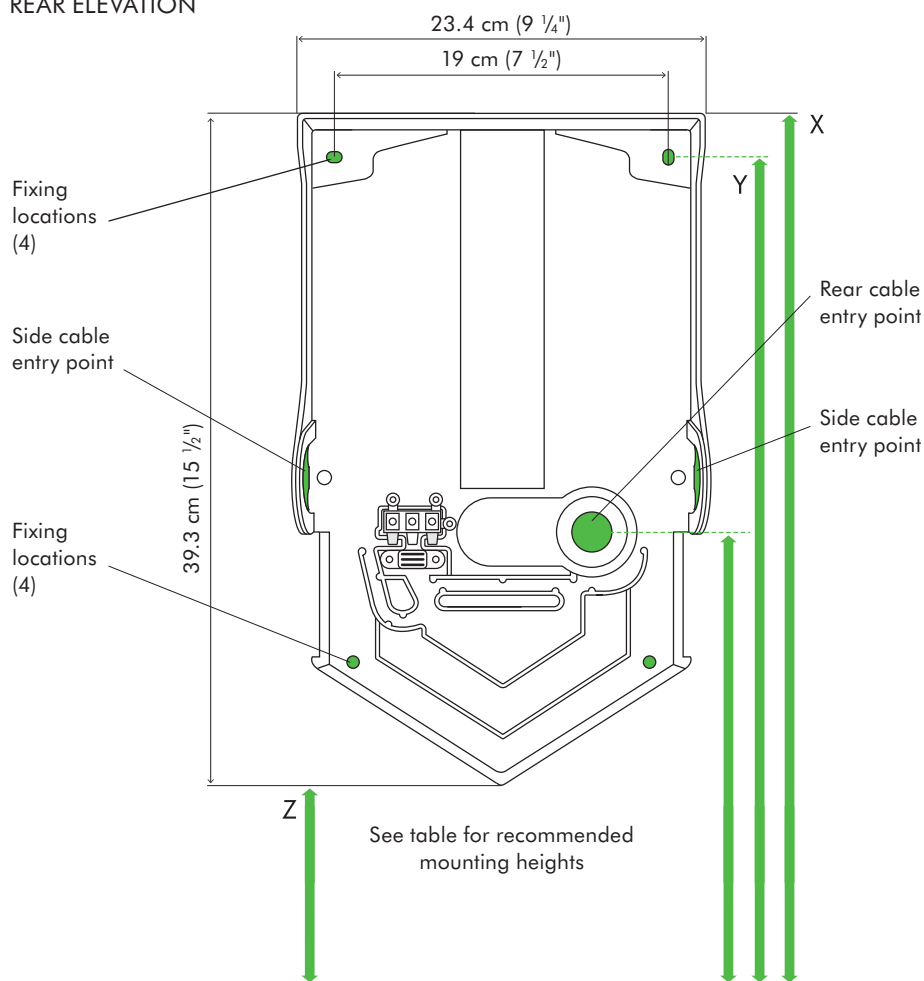

SIDE ELEVATION

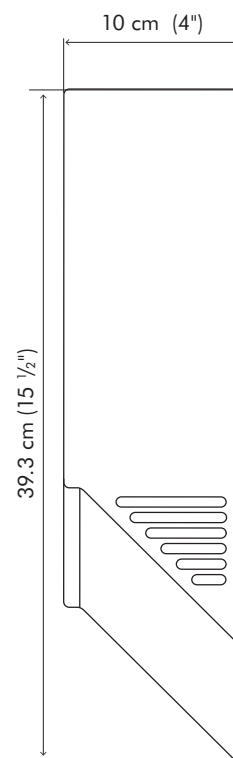

All dimensions shown in centimeters (+/- 0.5 centimeters) (+/- 3/16")

FLOOR

#### Recommended installation heights from floor

Male	X 132 cm (52 1/8")	Y 130 cm (51 3/16")	Z 93 cm (36 5/8")
Female	X 129 cm (50 3/4")	Y 126.5 cm (49 13/16")	Z 89.5 cm (35 1/4")
Child or disabled	X 107.5 cm (42 5/16")	Y 105 cm (41 3/8")	Z 65.5 cm (26 13/16")
Child 5-8	X 95.2 cm (37 1/2")	Y 92.5 cm (36 7/16")	Z 55.8 cm (22")
Child 8-11	X 105.2 cm (41 7/16")	Y 102.8 cm (40 1/2")	Z 65.8 cm (25 15/16")
Child 11-14	X 113.3 cm (44 5/8")	Y 110.8 cm (43 5/8")	Z 73.6 cm (29")

#### Machine dimensions

Height 39.3 cm (15 1/2") Width 23.4 cm (9 7/32") Depth 10 cm (4")

#### Minimum clearance

20.5 cm (8 11/16") clearance either side and 2 cm (13/16") above machine.

#### Cable entry point from floor

Male	108.9 cm (42 7/8")
Female	105.4 cm (41 1/2")
Child or disabled	84.1 cm (33 3/16")
Child 5-8	71.7 cm (28 1/4")
Child 8-11	81.7 cm (32 3/16")
Child 11-14	89.5 cm (35 1/4")

For further information please contact Dyson.

1-877-397-6622

www.dysonairblade.ca

# dyson airblade V

## HU02 High Voltage

### Electrical

Input voltage/Frequency: 200-240 V 50&60 Hz

Standby power consumption: Less than 0.5 W

Motor specifications: 1,000 W digital brushless motor

Heater type: None

### Construction

Fascia: Polycarbonate

Antibacterial coating type:

HU02 (Sprayed Nickel) contains antibacterial additive in paint.

HU02 (White) contains antibacterial moulded additive.

Can help prevent the growth of bacteria.

Back plate mounting bracket: ABS/PBT Plastic

Exterior screw type: Anti-tamper 4 mm Pin-Hex

Water ingress protection to IP24

### Filter

HEPA filter (Glass fibre and fleece prelayer)

99.97% of particles captured to the size of 0.3 microns

### Operation

Touch free capacitive sensor activation

Hand dry time measurement: 12 seconds

(Measurement based on NSF Protocol P.335)

Sound power level: 79 dB (A)

Sound pressure level @ 2 m: 63 dB(A)<sup>1</sup>

Operation lock-out period: 30 seconds

Airspeed at aperture: 690 km/h / 430 mph

Maximum altitude: 2,000 metres / 6,561 ft.

Operating temperature range: 0°C–40°C / 32°F–104°F

### Logistics

Single unit order code:

Sprayed Nickel: 307172-01, White: 307171-01

Unit barcode:

Sprayed Nickel: 885609009797, White: 885609009179

Net weight: 2.9 kg / 6.17 lbs

Packaged weight: 4.0 kg / 8.81 lbs

Packaged dimensions:

(H) 14.6 cm × (W) 45.4 cm × (D) 27.3 cm / (H) 5 3/4" × (W) 17 7/8" × (D) 10 3/4"

### Standard warranty

5 year parts, 1 year labour

<sup>1</sup>Sound pressure measured at 2 m distance, in a semi-anechoic chamber.



### Product range

Sprayed Nickel

White



The Carbon label is a trademark of the Carbon Trust.

The NSF logo is the registered trademark of NSF International.

Quiet Mark is a registered trademark of the Noise Abatement Society.

For further information please contact Dyson.

1-877-397-6622

[www.dysonairblade.ca](http://www.dysonairblade.ca)