


dyson airblade 9kJ

Dyson backplate technical specification



HU
03

Front elevation

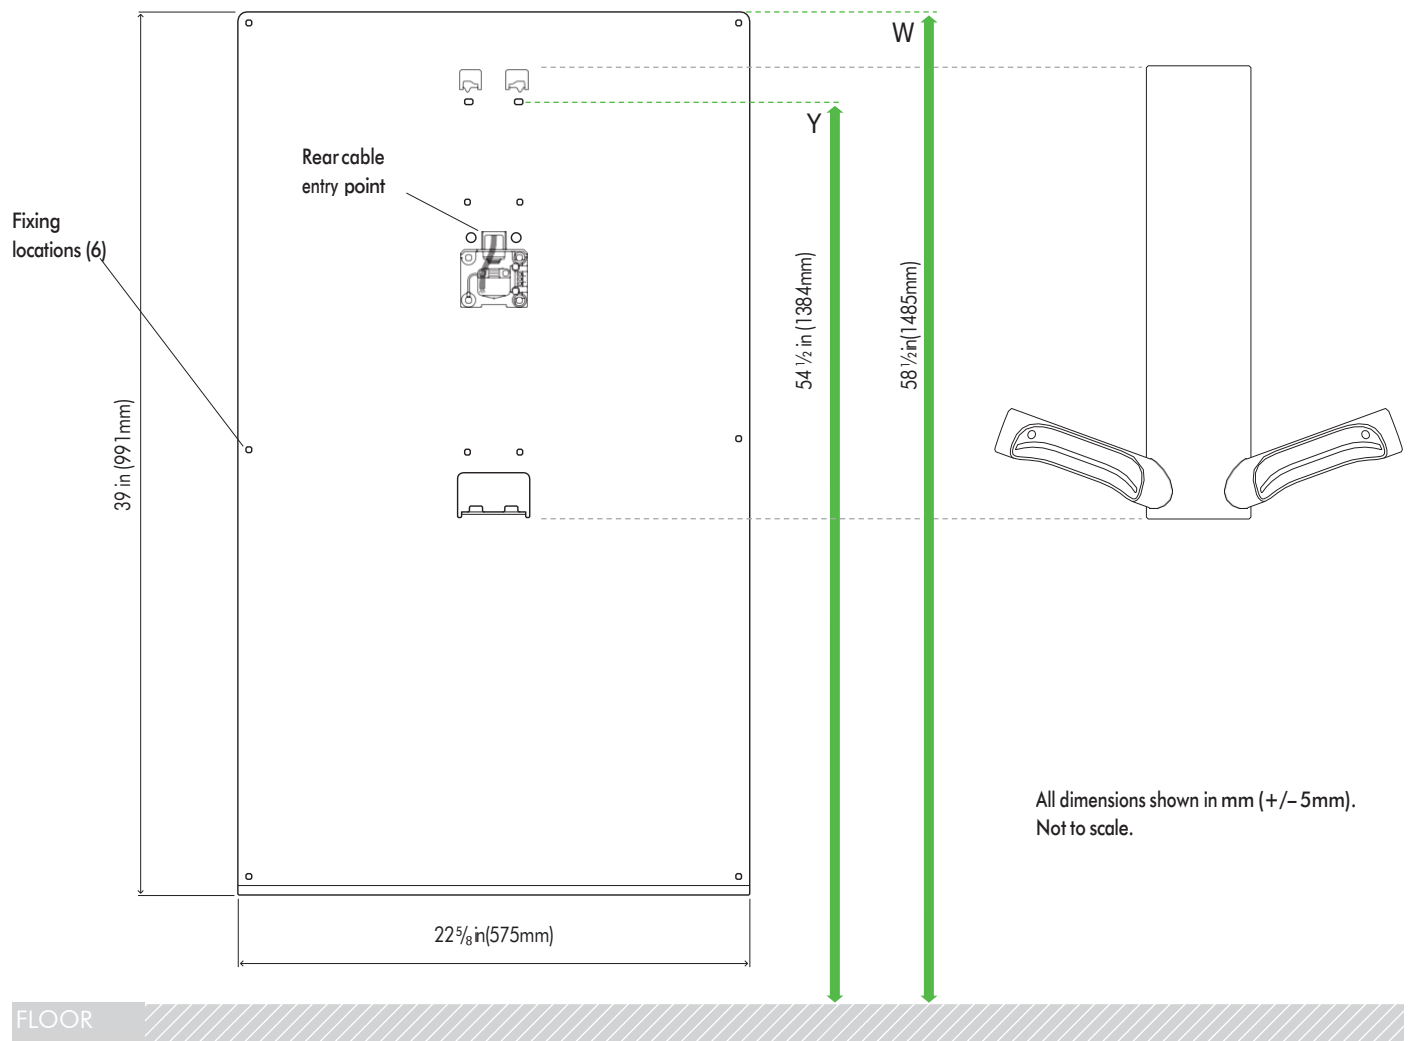

Dyson backplate dimensions
Height 39in (991mm) x Width 22 5/8 in (575mm) x Depth 3/16 in (5mm)
Minimum clearance
8 1/4 in (210 mm) above machine.

Recommended installation heights from floor	
Adult	X 54 1/2 in (1384mm)
Wheelchair/child	X 55 3/4 in (1416mm)
Rear cable entry point from floor	
Adult	48 1/4 in (1226mm)
Wheelchair/child	49 1/2 in (1258mm)

For further information please contact Dyson
866-236-3884
commercial.sales@dyson.com
www.dysoncanada.ca

Installing the Dyson backplate

Where only unsupported plasterboard is available for installation, a Dyson backplate must be used. Fixing to unsupported plasterboard (drywall) without the aid of a Dyson backplate will not result in safe and secure installation for your machine, and may also invalidate your warranty.

If the wall you are fixing the machine to has an airgap, the fixings used must be of a sufficient length to provide a secure installation. Do not use sealant when attaching the machine to the wall. The Dyson backplate helps protect the wall from water damage and can be used to cover holes/marks left from previously installed products.

Contact the Dyson Helpline for further information.

Construction

Stainless steel (brushed)

Back plate mounting bracket: Stainless steel – Brushed (304L)

Logistics

Net weight: 6.7 kg / 14.7 lbs

Packaged weight: 11.10kg / 24.47 lbs

Packaged Dimensions:

Height: 2 ¾ in (71 mm) x Width: 26 ¼ in (664 mm) x Depth: 51 in (1295 mm)

Standard warranty

5 year parts and limited labor warranty

