
## **TECHNICAL SPECIFICATION**



### REAR ELEVATION

AB 14

### SIDE ELEVATION

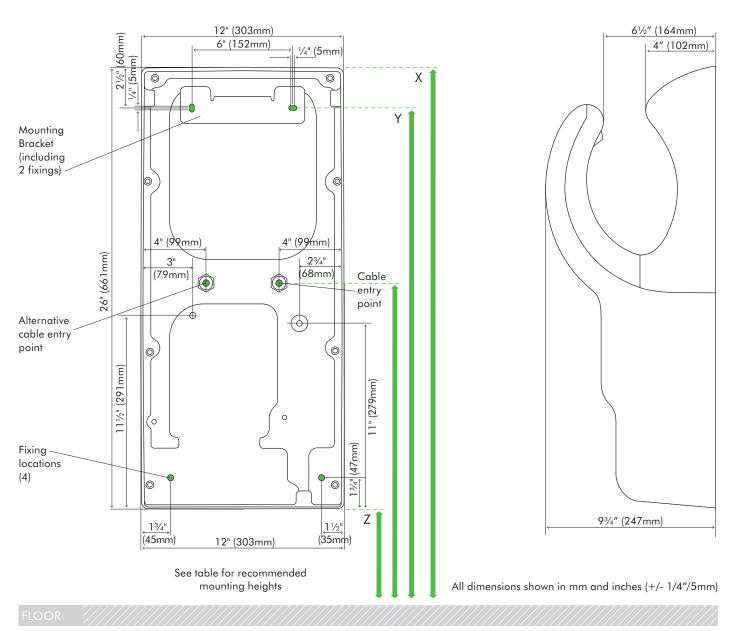

Recommended installation heights from floor				
Male (in / mm)	<b>X</b> 41¼ / 1050	Y 39 / 990	Z 15¼ / 390	
Female (in / mm)	<b>X</b> 38½ / 975	Y 36 / 915	<b>Z</b> 12½ / 315	
Child or disabled (in / mm)	X 34½ / 875	Y 32 / 815	Z 81/2 / 215	
Machine dimensions				

Height 26" (661mm) Width 12" (303mm) Depth 9¾" (247mm)

For further information please contact Dyson. 1-877-397-6622 www.dysonairblade.ca

### Minimum clearance

8″ (200mm) from floor; 2″ (50mm) clearance either side and above machine.		
Cable entry point from floor		
Male	28½″ (725mm)	
Female	25½″ (650mm)	
Child or disabled	21½″ (550mm)	

# dyson airblade dB



Electrical
Input voltage/Frequency: 120-127V 50 & 60 Hz
Rated power: 1400 W
Motor type: Dyson digital motor V4 – brushless DC Motor
Motor switching rate: 6,000 per second
Motor speed: 92,000 rpm
Operating temperature range: 0°– 40°C
Heater type: None
Standby power consumption: 0.5 W or below
Construction
Casing construction: Polycarbonate-ABS casing
Antimicrobial coating type: Antimicrobial moulded additive in facia and blades
Bacterial reduction rate from external surfaces: Up to 99.9% over 24 hou
Colour finish: Grey or White
Light reflective value: 28.3 (grey) 77.4 (white)
Galvanised steel back plate/mounting bracket
Exterior screw type: Anti-tamper M6 machine screw
Water ingress protection to IP35
Filter
HEPA filter (glass fibre and fleece prelayer)
Bacteria removal from air: 99.9%
Operation
Touch-free infra-red activation
Hand dry time measurement: 12 seconds. (Measurement based on National Sanitation Foundation Protocol P.335)
Operation lock-out period: 30 seconds
Airspeed at apertures: 675 km/h
Operating girflows Up to 35 L/c



Touch-free infra-red activation	
Hand dry time measurement: 12 seconds. (Measurement based on National Sanitation Foundation Protocol P.335)	
Operation lock-out period: 30 seconds	
Airspeed at apertures: 675 km/h	
Operating airflow: Up to 35 L/s	
Rated operating noise power: 81 db(A)	

### Logistics

Serial number prefix: Grey FT6; White FT7
Single unit order code: Grey 300681-01; White 300682-01
Net weight: 18.1 lbs (8.2kg)
Packaged weight: 24.3 lbs (11kg)
Packaged dimensions (in/mm): H28 $\frac{3}{4}$ /732 × W14/356 × D12/305
Unit barcode: Grey 8856 0900 151 7; White 8856 0900 152 4

### Standard warranty

5 year parts, 1 year labour warranty

### **Product Certification**

ETL - Complies with: CAN/CSA-E60335-2-23 ADA Compliant





The Carbon Reduction Label is the registered trade mark of the Carbon Trust. HACCP International non-food certification mark is the registered trademark of HACCP International. HACCP International have certified Dyson products based on their recommended installation and operating conditions. Licensed by Dyson. The NSF logo is the registered trade mark of NSF International.

For further information please contact Dyson. 1-877-397-6622 www.dysonairblade.ca

### **Product range**